


Eonis 19" (MDRC-1219)

19" clinical display for hospital-wide viewing of clinical data and images

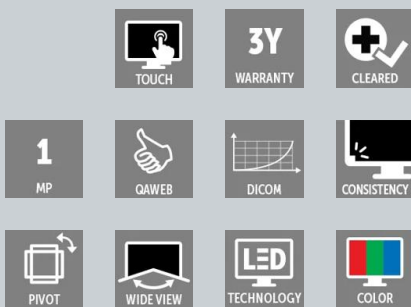

- **Fit for clinical use**
- **Automated Quality Assurance and calibration**
- **Front consistency sensor technology**
- **Different versions available**

The MDRC-1219 brings reliable, DICOM compliant images to a broad palette of imaging applications, including EMR. It combines consistent image quality and an attractive, versatile design with effortless quality assurance. A touchscreen version is also available.

Consistent images, easy collaboration

The high-quality display presents sharp, bright images with high contrast. The unique front consistency sensor automatically aligns the image quality every time the display is switched on, ensuring fast power-up and continuous luminance stability.

Result? Consistent images that make collaboration between specialists easier. They can discuss images with colleagues at multiple locations, knowing that everyone is seeing identical images.

Quality assured, automatically

The MDRC-1219 comes with Barco's cloud-based QAWeb Enterprise software, an online service for calibration, Quality Assurance and asset management. Praised in hospitals around the world, QAWeb Enterprise allows healthcare IT and PACS administrators to centrally and remotely manage image quality across the healthcare organization, at the click of a button.

Fit for clinical use

The unique 5:4 aspect ratio is ideal for viewing all types of applications and images from medical modalities. Like every Barco clinical display, the MDRC-1219 complies with international medical and patient safety standards.

Models



- MDRC-1219: standard model
- MDRC-1219 TS: touchscreen
- MDRC-1219 HB: high-bright version
- MDRC-1219 HB TS: high-bright model with touchscreen

Please consult your Barco representative or distributor in your country or territory to confirm availability. A reference to any product or service on this site does not imply that such product is or will be available in your location.

Product specifications**EONIS 19" (MDRC-1219)**

General specifications	
Screen technology	Standard versions: IPS TFT High bright versions: IPS AHVA
Active screen size (diagonal)	482 mm (19.0")
Active screen size (H x V)	376 x 301 mm (14.81 x 11.85")
Aspect ratio (H:V)	5:4
Resolution	1MP (1280 x 1024 pixels)
Pixel pitch	0.294 mm
Color imaging	Yes
Gray imaging	Yes
Bit depth	8 bit (DVI) 10 bit (DisplayPort)
Viewing angle (H, V)	178°
Ambient light presets	Yes, reading room selection
Backlight Output Stabilization (BLOS)	Standard versions: No High bright versions: Yes
Front sensor	Standard versions: Yes, Front Consistency Sensor High bright versions: No
Maximum luminance (panel typical)	Standard versions: 330 cd/m ² High bright versions: 700 cd/m ²
DICOM calibrated luminance	Standard versions: 250 cd/m ² High bright versions: 400 cd/m ²
Contrast ratio (panel typical)	Standard versions: 1000:1 High bright versions: 900:1
Response time ((Tr + Tf)/2) (typical)	Standard versions: 15 ms High bright versions: 12.5 ms
Housing color	Black
Video input signals	DVI (DVI-D and DVI-A) DisplayPort
USB ports	1x USB 2.0 upstream (endpoint) Standard versions: 2x USB 2.0 downstream High bright versions: 1x USB 2.0 downstream
Power requirements	Internal power supply (100-240 Vac, 50/60 Hz)
Power consumption	Standard versions: 22 W (nominal) High bright versions: 25 W (nominal) < 0.5 W (standby)
Dimensions with stand (W x H x D)	Portrait: 348 x 440~550 x 201 mm Landscape: 411 x 408~518 x 201 mm
Dimensions w/o stand (W x H x D)	411 x 348 x 67 mm
Dimensions packaged (W x H x D)	426 x 592 x 326 mm
Net weight with stand	MDRC-1219: 5.3 kg MDRC-1219 (option TS): 6.1 kg MDRC-1219 (option HB): 5.4 kg MDRC-1219 (option HB TS): 6.2 kg
Net weight w/o stand	MDRC-1219: 3.1 kg MDRC-1219 (option TS): 3.9 kg MDRC-1219 (option HB): 3.2 kg MDRC-1219 (option HB TS): 4.0 kg
Net weight packaged	MDRC-1219: 8.1 kg MDRC-1219 (option TS): 8.9 kg MDRC-1219 (option HB): 7.4 kg MDRC-1219 (option HB TS): 8.2 kg
Tilt	-5° to +22°
Swivel	N/A
Pivot	90°
Height adjustment range	110 mm
Mounting standard	VESA (100 mm)
Screen protection	Touch versions: PCAP touchscreen Other versions: N/A
Recommended modalities	Reviewing of digital images

Product specifications

EONIS 19" (MDRC-1219)

Certifications

Standard versions:
FDA Class I,510(k) exempt
CE (Medical Device Class I)
CCC (China), Inmetro (Brazil), KC (Korea), BIS (India), EAC (Russia, Kazakhstan, Belarus, Armenia and Kyrgyzstan)

Safety specific:
IEC 60950-1:2005 +A1:2009 +A2:2013
EN 60950-1:2006 + A1:2010 + A11:2009 + A12:2011 + A2:2013
IEC 60601-1: 2005 + CORR. 1:2006 + CORR. 2:2007 + AM1:2012
EN 60601-1:2006 + A1:2013 + A12:2014
ANSI/AAMI ES 60601-1:2005 + R1:2012
CAN/CSA C22.2 No. 60601-1:2014

EMI specific:
IEC 60601-1-2: 2014 (ed4)
EN 60601-1-2: 2015 (ed4)
ICES-003 Level B

Environmental:
China Energy Label, EU RoHS, China RoHS, REACH, Canada Health, WEEE, Packaging Directive

High bright versions:
FDA Class I,510(k) exempt
CE (Medical Device Class I)

Safety specific:
IEC 60950-1:2005 +A1:2009 +A2:2013
EN 60950-1:2006 + A1:2010 + A11:2009 + A12:2011 + A2:2013
IEC 60601-1: 2005 + CORR. 1:2006 + CORR. 2:2007 + AM1:2012
EN 60601-1:2006 + A1:2013 + A12:2014
ANSI/AAMI ES 60601-1:2005 + R1:2012
CAN/CSA C22.2 No. 60601-1:2014

EMI specific:
IEC 60601-1-2: 2014 (ed4)
EN 60601-1-2: 2015 (ed4)
ICES-003 Level B

Environmental:
EU RoHS, REACH, Canada Health, WEEE, Packaging Directive

Supplied accessories

1x DisplayPort video cable
1x USB cable
1x printed User Guide (in English, other languages can be found on the documentation disc)
1x documentation disc
1x system sheet
Mains cables

QA software

QAWeb

Warranty

3 years

Operating temperature

Standard versions: 0 °C to +35 °C
High bright versions: 0°C to +40 °C

Storage temperature

-20 °C to +60 °C

Operating humidity

Standard versions: 20 % to 80 % (non-condensing)
High bright versions: 8 % to 80 % (non-condensing)

Storage humidity

Standard versions: 10 % to 90 % (non-condensing)
High bright versions: 5 % to 90 % (non-condensing)

Operating pressure

70 kPa minimum

Storage pressure

50 to 106 kPa

Last updated: 21 Jun 2023

© 2018 Barco nv. All rights reserved. Reproduction in whole or in part without written permission is prohibited. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Due to continued innovation, information and technical specifications are subject to change without prior notice. Please check www.barco.com for the latest specifications.